



L±2"(L±50)

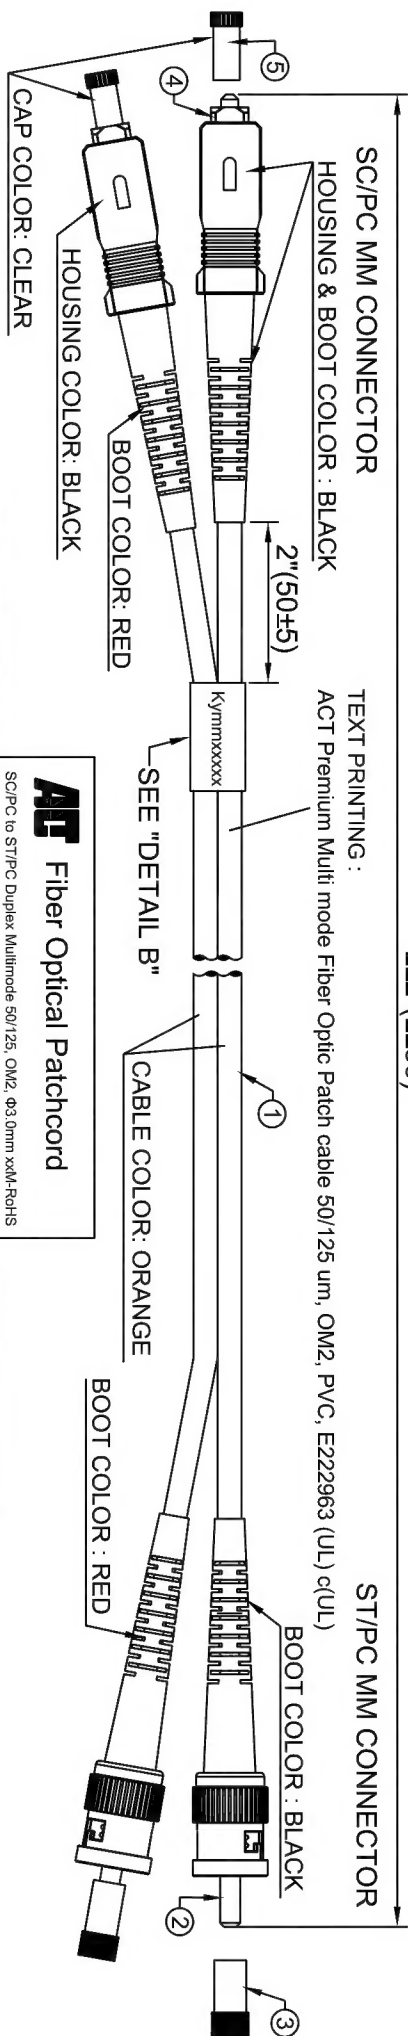


NOTE:

1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE STRENGTH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES
LARGE	POLYBAG	ALL
EACH LARGE POLYBAG IN AN OUTER CARTON		

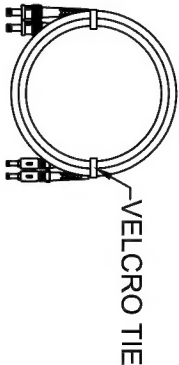

DETAIL A



DETAIL C

ATF Fiber Optical Patchcord

SC/PC to ST/PC Duplex Multimode 50/125, OM2, Ø3.0mm xx4-RohS

Model: xxxxxx -xxxxxx

Lot number: _____

Performance: (@23°C) A=850/1310±20nm

X XXXXX X XXXXX X

Serial No

A	850nm	1310nm
B		
C		
D		

Insertion Loss ≤ 0.3dB

Prepared By: _____ Date: _____

Y: Year, mm: Month
xxxxx: Serial Number

DETAIL B

5	2PCS	SC DUST COVER, CLEAR.
4	2SETS	CONNECTOR: SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.
3	2PCS	ST DUST COVER, CLEAR.
2	2SETS	CONNECTOR: ST/PC MM, WITH BLACK & RED BOOT.
1	1PC	CABLE: MULTIMODE, 50/125um, 3.0mm ZIPPORD, OFNR, ORANGE JACKET.
ITEM	QTY	PART NO.

DESCRIPTION

PART LIST

REV.	REVISION	DATE
------	----------	------

RL2510	10	10	32.8'(10000)	413210-RL2510	8716065223682
RL2505	05	5	16.4'(5000)	413205-RL2505	8716065223675
RL2503	03	3	9.84'(3000)	413203-RL2503	8716065223668
RL2502	02	2	6.56'(2000)	413202-RL2502	8716065223651
RL2551	51	1.5	4.92'(1500)	4132015-RL2551	8716065223644
RL2501	01	1	3.28'(1000)	413201-RL2501	8716065223637
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CUSTOMER APPROVAL:

DATE:



UNIT:	Inches[mm]
-------	------------

DRAWN BY	DATE	TITLE:
Catherine	2007/10/4	PATCHCORD SC-ST MULTIMODE DUPLEX 50/125, OM2, 3.0mm, ORANGE.

CHECKED BY	DATE	CUSTOMER	CUSTOMER PART NO.
			RL25**

APPROVED BY	DATE	DRAWING NO.	Ref. NO.	REV.
		PK709004		A

SALE BY	DATE	TRENDX PART NO.
---------	------	-----------------